


# L&L LOUVERS INC.

12355 DOHERTY STREET RIVERSIDE, CA. 92503 (951) 735-9300 FAX:(951)735-4628 E-MAIL: info@louver1.com

## MODEL 500-S-PV STANDARD MULT-USE ACCESS DOOR W/PUNCH VENT

for installation in surfaces such as wailboard,plaster,wood or masonry.

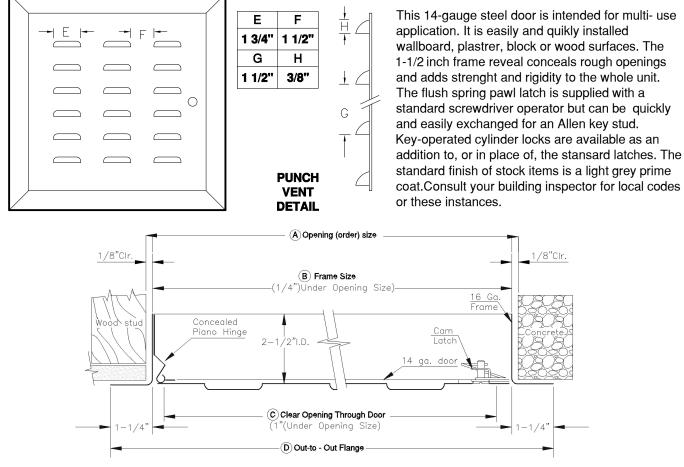

### CONSTRUCTION:

DOOR:	14 Ga., Flat, galvanized (jetcoat) steel.
FRAME:	16 Ga., mitered and welded corners, galvanized (jetcoat).
HINGE:	Continuous, concealed, piano type with stainless steel pin.
LOUVER:	18 Ga. Jetcoat, welded to face of door.
LOCK:	Flush, screwdriver-operated, self-adjusting spring pawl latch. (ALL DOORS OVER 22" ARE SUPPLIED WITH 4 OR MORE LATCHES.) Allen keyed latches and keyed cylinder locks are available on request, as well as other special types of locking devices.
FINISH:	Rustproof, "cool-phos", water-free iron phosphate coating and baked on polyester powder prime coat paint. Light grey semigloss color is standard, but white and medium bronze are available on orders of 25 or more units. Any custum color is available at an increase in cost.

SIZES: (SEE PRICE LIST FOR STANDARD SIZES.)

Α	В	С	D
Opening (Order Size)	-1/4" from A	-1" from A	+2 1/2" to A
(i.ቀ.) 12" x 12"	11 3/4" x 11 3/4"	11" x 11"	14 1/2" x 14 1/2"

- A Opening Order Size
- B Frame Size-1/4" less than "A."
- C Clear opening 1" less than "A."
- D Overall size of Frame 2 1/2" larger than "A".

# standard, but white and medium bronze are available on orders of 25 or more units. Any custum color is available at an increase in cost. L&L LOUVERS manufactures all sizes of access doors. PROJECT: LOCATION: ARCHITECT: CONTRACTOR: CUSTOMER:

### BROCHURE: JULY 09